

## TECHNICAL SHEET

1905-30

Mounting: Applique / Wall lamp

Environment: Indoor - IP20

Materials: Metallo / Metal

Voltage: 220-240V 50/60Hz

Source: LED 20W - CRI=90


Color Temperature: 3000K / 2700K

Lumen: 1500 lm

Lighting Control: Dimmable 0-10V / DALI



1905-30

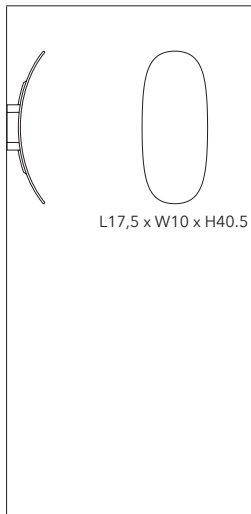

## Finiture / Finishes

---

### Struttura / Structure



Nero opaco  
Matt black



Bianco opaco  
Matt white



Titanio opaco  
Matt titanium

## CODES

CODICI / CODES	MISURA / SIZE	STRUTTURA / STRUCTURE	DIFFUSORE / SHADE	DETTAGLI / DETAILS
1905-30-1100-PXNE	wall lamp	nero opaco / matt black		dimmbale DALI 3000K
1905-30-1100-PXWE	wall lamp	nero opaco / matt black		dimmbale DALI 2700K
1905-30-1100-DXNE	wall lamp	nero opaco / matt black		dimmbale 0-10V 3000K
1905-30-1100-DXWE	wall lamp	nero opaco / matt black		dimmbale 0-10V 2700K
1905-30-0100-PXNE	wall lamp	bianco opaco / matt white		dimmbale DALI 3000K
1905-30-0100-PXWE	wall lamp	bianco opaco / matt white		dimmbale DALI 2700K
1905-30-0100-DXNE	wall lamp	bianco opaco / matt white		dimmbale 0-10V 3000K
1905-30-0100-DXWE	wall lamp	bianco opaco / matt white		dimmbale 0-10V 2700K
1905-30-1800-PXNE	wall lamp	titanio opaco / matt titanium		dimmbale DALI 3000K
1905-30-1800-PXWE	wall lamp	titanio opaco / matt titanium		dimmbale DALI 2700K
1905-30-1800-DXNE	wall lamp	titanio opaco / matt titanium		dimmbale 0-10V 3000K
1905-30-1800-DXWE	wall lamp	titanio opaco / matt titanium		dimmbale 0-10V 2700K

